



DC/DC CONVERTERS INVERTERS & CHOPPER



Linea Elettromeccanica | Electromechanical Line





DC/DC CONVERTERS.....	page 4-11
INVERTERS THOR.....	page 12
INVERTERS TC.....	page 13-16
CHOPPER TM.....	page 17-18

DC/DC CONVERTER

LINEAR VOLTAGE REGULATOR

12V → 5V 100mA



TECHNICAL SPECIFICATIONS

Input voltage	12V		
Output voltage	5V		
Maximum current output	100mA		
Short circuit protected output	Yes		
Reverse polarity protected input	Yes		
Dimensions	30mm x 51mm x 31,5mm		
Operating temperature	-20°C ÷ +65°C		
Storage temperature	20°C ÷ +85°C		
Sealing degree	IP66		
Connector	JWPF 3 pins		

Purchase code	Pkg	20	1030773				
Drawing code	Q.ty		34.0188.0000				
Input voltage			12V				
Output voltage			5V				

DC/DC CONVERTER

VOLTAGE CONVERTER

24V → 12V



TECHNICAL SPECIFICATIONS


Input voltage	19 - 30V	Sealing degree	IP65
Output voltage	13,2V ± 1,5V	Connector	AMP 3 pins
Nominal current output (1 hr. rating)	3A		
Nominal current	3,5A		
Stand-by current	35mA		
Short circuit protected output	Yes		
Reverse polarity protected input	Yes		
Dimensions	108mm x 35mm x 62mm		
Operating temperature	-30°C ÷ +60°C		
Storage temperature	-40°C ÷ +85°C		

Purchase code	Pkg	1	1031509				
Drawing code	Q.ty		39.0030.0000				
Input voltage			19 - 30V				
Output voltage			13,2V ± 1,5V				

DC/DC CONVERTER

LINEAR VOLTAGE CONVERTER

24V → 12V

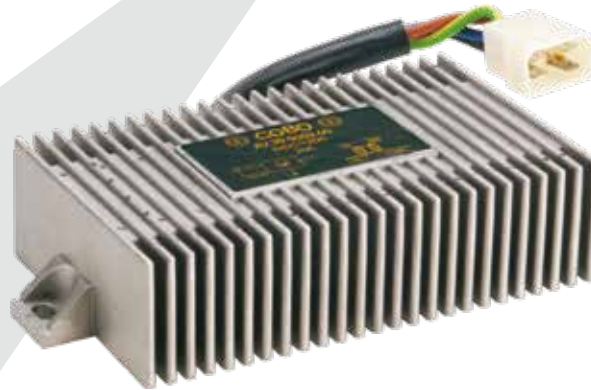

TECHNICAL SPECIFICATIONS

Input voltage	16 - 32V	Sealing degree	IPX5
Output voltage	13,6 ± 0,5V	Connector	AMP 4 pins
Nominal current	20A		
Stand-by current	100mA closed contact 1mA open contact		
Short circuit protected output	Yes		
Reverse polarity protected input	Yes		
Dimensions	193,8mm x 41,5mm x 97,6mm		
Operating temperature	-30°C ÷ +80°C		
Storage temperature	-40°C ÷ +85°C		

Purchase code	Pkg	1031511					
Drawing code	Q.ty	39.0031.0000					
Input voltage	1		16 - 32V				
Output voltage			13,2V ± 1,5V				

DC/DC CONVERTER

VOLTAGE CONVERTER

24V → 12V



TECHNICAL SPECIFICATIONS

Input voltage	18 - 32V	Maximum peak power	130W
Output voltage	13,5V	Nominal power rating	100W
Maximum current	10A	Frequency	62kHz
Nominal current output (1 hr. rating)	7,4A	Shock and vibration	SAE J1378
Output voltage regulation	+ / - 0,5V	Dimensions	110mm x 56mm x 105mm
Output ripple voltage	200mVpk-pk	Operating temperature	-30°C + +60°C
Short circuit protected output	Yes	Storage temperature	-40°C + +70°C
Reverse polarity protected input	Yes	Sealing degree	IP64
Overload protection	Yes	Connector	DEUTSCH 3 pins
Thermal protection	Yes		

Purchase code	Pkg	1031521					
Drawing code	Q.ty	39.015.000					
Input voltage		18 - 32V					
Output voltage		13,5V					

DC/DC CONVERTER

VOLTAGE CONVERTER

48 - 80V → 24V



TECHNICAL SPECIFICATIONS

Input voltage	48 - 80V	Nominal power rating	200W
Output voltage	24V	Frequency	62kHz
Maximum current	10A	Shock and vibration	SAE J1378
Nominal current output (1 hr. rating)	8,3A	Dimensions	110mm x 56mm x 105mm
Output voltage regulation	+ / - 1V	Operating temperature	-30°C + +55°C
Output ripple voltage	100mVpk-pk	Storage temperature	-40°C + +70°C
Short circuit protected output	Yes	Sealing degree	IP64
Reverse polarity protected input	Yes	Connectors	BPF 2 pins + BPM 2 pins
Overload protection	Yes		
Maximum peak power	250W		

Purchase code	Pkg	1031517					
Drawing code	Q.ty	39.013.000					
Input voltage		48 - 80V					
Output voltage		24V					

DC/DC CONVERTER

VOLTAGE CONVERTER

48 - 80V → 24V



TECHNICAL SPECIFICATIONS

Input voltage	48 - 80V	Nominal power rating	200W
Output voltage	24V	Frequency	62kHz
Maximum current	10A	Shock and vibration	SAE J1378
Nominal current output (1 hr. rating)	8,3A	Dimensions	140mm x 61mm x 80mm
Output voltage regulation	+ / - 1V	Operating temperature	-30°C + +55°C
Output ripple voltage	100mVpk-pk	Storage temperature	-40°C + +80°C
Short circuit protected output	Yes	Sealing degree	IP64
Reverse polarity protected input	Yes	Connectors	2 X Faston AMP + BPM 8 pins
Overload protection	Yes		
Maximum peak power	250W		

Purchase code	Pkg	1031518					
Drawing code	Q.ty	39.014.000					
Input voltage		48 - 80V					
Output voltage		24V					

DC/DC CONVERTER

VOLTAGE CONVERTER

12V → 24V



TECHNICAL SPECIFICATIONS

Input voltage	9 - 18V	Dimensions	160mm x 181mm x 88,5mm
Output voltage	27,5 - 28,5V	Operating temperature	-30°C + +45°C
Input current @ POUT 700W Vin 13,5V	56V	Sealing degree	IP66
Maximum peak power	750W	Connector	DEUTSCH 4 pins
Nominal power rating	700W		
Frequency	60kHz		
Nominal input voltage	13,5V		
Nominal output voltage (lin bus)	22 - 32V		
Output voltage regulation	+ / - 0,5V		
Output ripple voltage	50mVpk-pk		

Purchase code	Pkg	1	1031505				
Drawing code	Q.ty		39.0028.0000				
Input voltage			9 - 18V				
Output voltage			27,5 - 28,5V				

DC/DC CONVERTER

VOLTAGE CONVERTER

48V → 12V

24V → 12V



TECHNICAL SPECIFICATIONS

Maximum current output	14,5A	Frequency	64kHz
Nominal current output	12,5A	Shock and vibration	SAE J1378
Output voltage regulation	+ / - 1V	Dimensions	180mm x 88,5mm x 160mm
Output ripple voltage	100mVpk-pk	Operating temperature	-30°C + +45°C
Short circuit protected output	Yes	Storage temperature	-40°C + +70°C
Reverse polarity protected input	Yes	Sealing degree	IP65
Overload protection	Yes	Electromagnetic compatibility (EMC)	61000-6-3 for emission 61000-6-2 for immunity
Maximum peak power	350W	Connector	DEUTSCH 4 pins
Input/output isolation (1000vrms)	Yes		
Nominal power rating	300W		

Purchase code	Pkg	1031501	1031502	1031503	1031504		
Drawing code	Q.ty	39.0022.0000	39.0023.0000	39.0026.0000	39.0027.0000		
Input voltage	1	48V	48V	24V	24V		
Output voltage		12V	12V	12V	12V		
Load sharing (max 5 units)			X		X		

THOR 2

INVERTER



TECHNICAL SPECIFICATIONS

Digital input	10	Sealing degree	IP54
Analog input	2	Dimensions	230mm x 200mm x 140mm
Power output	2	Connector	AMPSEAL 23 pins
Led output	-		
Encoder output	1		
Encoder type	Open collector or differential		
Motor thermal input	1		
Switching frequency	8kHz		
Regulation	EN1175-1:1998		
Operating temperature	-40°C ÷ +40°C		

Purchase code	Pkg	1031524	1031525	1031526	1031527		
Drawing code	Q.ty	40.0007.0000	40.0008.0000	40.0009.0000	40.0010.0000		
Battery voltage	1	48V	80V	48V	48V		
Nominal current (1h) [Arms]		180	160	160			
Max current (1h) [Arms]		450 (3 min)	350 (3 min)	350 (3 min)	200 (3 min)		
Encoder open collector		X	X	X	X		

Traction Controller

TC - S

INVERTER



TECHNICAL SPECIFICATIONS

Digital input	7	Sealing degree	IP65
Analog input	3	Interface	CAN
Power output (contactor)	3	Dimensions	160mm x 200mm x 75mm
Digital outputs	1	Connector	AMPSEAL 35 pins
Encoder type	Sin/cos or incremental		
Motor thermal input	1		
Switching frequency	8kHz		
Motor frequency (max)	16KHz		
Regulation	EN12895 - EN1175		
Operating temperature	-30°C ÷ +40°C		

Purchase code Drawing code	Pkg Q.ty	1093253 40.0036.0000	1093256 40.0039.0000	1093435 40.0043.0000	1093438 40.0046.0000	
Battery voltage	1	24 ÷ 48V	60 ÷ 96V	24 ÷ 48V	60 ÷ 96V	
Nominal current		130A	75A	130A	75A	
Peak current (2 min)		250A	140A	250A	140A	
Type of motor		3 phase AC motor	3 phase AC motor	PMS motor	PMS motor	

Traction Controller

TC - M

INVERTER



TECHNICAL SPECIFICATIONS

Digital input	7	Sealing degree	IP65
Analog input	3	Interface	CAN
Power output (contactor)	3	Dimensions	200mm x 200mm x 75mm
Digital outputs	1	Connector	AMPSEAL 35 pins
Encoder type	Sin/cos or incremental		
Motor thermal input	1		
Switching frequency	8kHz		
Motor frequency (max)	16KHz		
Regulation	EN12895 - EN1175		
Operating temperature	-30°C ÷ +40°C		

Purchase code	Pkg	1093254	1093257	1093436	1093439	
Drawing code	Q.ty	40.0037.0000	40.0040.0000	40.0044.0000	40.0047.0000	
Battery voltage	1	24 ÷ 48V	60 ÷ 96V	24 ÷ 48V	60 ÷ 96V	
Nominal current		230A	140A	230A	140A	
Peak current (2 min)		450A	270A	450A	270A	
Type of motor		3 phase AC motor	3 phase AC motor	PMS motor	PMS motor	

Traction Controller

TC - M+

INVERTER



TECHNICAL SPECIFICATIONS

Digital input	7	Sealing degree	IP65
Analog input	3	Interface	CAN
Power output (contactor)	3	Dimensions	250mm x 200mm x 75mm
Digital outputs	1	Connector	AMPSEAL 35 pins
Encoder type	Sin/cos or incremental		
Motor thermal input	1		
Switching frequency	8kHz		
Motor frequency (max)	16KHz		
Regulation	EN12895 - EN1175		
Operating temperature	-30°C ÷ +40°C		

Purchase code Drawing code	Pkg Q.ty	1093255 40.0038.0000	1093258 40.0041.0000	1093437 40.0045.0000	1093440 40.0048.0000	
Battery voltage		24 ÷ 48V	60 ÷ 96V	24 ÷ 48V	60 ÷ 96V	
Nominal current		330A	230A	330A	230A	
Peak current (2 min)		600A	450A	600A	450A	
Type of motor		3 phase AC motor	3 phase AC motor	PMS motor	PMS motor	

Traction Controller

TC - L

INVERTER



TECHNICAL SPECIFICATIONS

Digital input	7	Sealing degree	IP65
Analog input	3	Interface	CAN
Power output (contactor)	3	Dimensions	320mm x 200mm x 75mm
Digital outputs	1	Connector	AMPSEAL 35 pins
Encoder type	Sin/cos or incremental		
Motor thermal input	1		
Switching frequency	8kHz		
Motor frequency (max)	16KHz		
Regulation	EN12895 - EN1175		
Operating temperature	-30°C ÷ +40°C		

Purchase code	Pkg	1093259	1093441			
Drawing code	Q.ty	40.0042.0000	40.0049.0000			
Battery voltage		60 ÷ 96V	60 ÷ 96V			
Nominal current		300A	300A			
Peak current (2 min)		600A	600A			
Type of motor		3 phase AC motor	PMS motor			

Traction Module

TM 1+ / TM 3

CHOPPER



TECHNICAL SPECIFICATIONS

Power supply	24V		
Regulation	EN1175-1:1998		
Operating temperature	-40°C + +40°C		
Sealing degree	IP65		
Dimensions	170mm x 201mm x 68mm		
Connector	AMPSEAL 26 pins		

Purchase code Drawing code	Pkg Q.ty	1	TM1+ 1091431 40.0032.0000	TM3 1091432 40.0033.0000		
Power output			5	1		
Battery voltage			14,5 - 32V	14,5 - 32V		
Pump nominal current (1h) [Arms]			90	125		
Traction nominal current (1h) [Arms]			70	-		
Pump max current (2 min) [Arms]			200	275		
Traction max current (2 min) [Arms]			150	-		

Traction Module TM 2

CHOPPER



TECHNICAL SPECIFICATIONS

Power supply	24V		
Regulation	EN1175-1:1999		
Operating temperature	-40°C ÷ +40°C		
Sealing degree	IP65		
Dimensions	177mm x 220mm x 68mm		
Connector	AMPSEAL 26 pins		

Purchase code	Pkg	1091433					
Drawing code	Q.ty	40.0034.0000					
Power output	1						
Battery voltage		5					
Pump nominal current (1h) [Arms]		14,5 - 32V					
Traction nominal current (1h) [Arms]		125					
Pump max current (2 min) [Arms]		70					
Traction max current (2 min) [Arms]		275					
		180					

Note / Notes



GERMANY

COBO DEUTSCHLAND GmbH
 Zum Schürmannsgraben, 12E
 D-47441 - Moers
 Germany
 Phone: +49 (0) 2841 88238 0
 Fax: +49 (0) 2841 88238 23
 E-mail: info@cobogroup.net
 Web Site: www.cobo-deutschland.com

FRANCE

COBO FRANCE Sarl
 Allée de l'Europe, 2 - Zone Coriolis
 71210 - Ecuisses
 France
 Phone: +33 (0) 3 857 30560
 Fax: +33 (0) 3 857 85606
 E-mail: info@cobogroup.net
 Web Site: www.cobofrance.com

NORTH AMERICA

COBO USA Corporation
 West Division Street, 304
 52655 - West Burlington
 Iowa - Usa
 Phone: +1 319 754 5585
 Fax: +1 319 754 8724
 E-mail: info@cobogroup.net
 Web Site: www.cobointernational.com

LATIN AMERICA

COBO COMPONENTES AGR. E IND. Ltda
 Rua Dona Francisca, 8300 - Bloco 9-C
 89219-600 Zona Industrial - Joinville
 Santa Catarina - Brasil
 Phone: +55 47 3305 0095
 E-mail: info@cobogroup.net
 Web Site: www.cobogroup.net

OCEANIA

COBO OCEANIA Ltd
 Burnside Road, 9/93
 4207 Stapylton - Brisbane
 Queensland - Australia
 Phone: +61 (0) 7 3807 4866
 Fax: +61 (0) 7 3807 6780
 E-mail: info@cobogroup.net
 Web Site: www.cobo.com.au

SOUTH-EAST ASIA

COBO ASIA Ltd
 Heung Yip Road, 2 - One Island South
 622 6/F Unit - Wong Chuk Hang
 Hong Kong
 Phone: +852 3590 3588
 Fax: +852 3590 3566
 E-mail: info@cobogroup.net
 Web Site: www.cobogroup.net

CHINA

COBO GUANGZHOU Ltd
 Qiaotou Street, 226 - Beishan - Haizhu
 51000 - Guangzhou
 People's Republic of China
 Phone: +86 20 8922 5611
 Fax: +86 20 8922 5635
 E-mail: info@cobogroup.net
 Web Site: www.cobochina.cn

INDIA

COBO INDIA Branch Office
 Mathura Road, 13/6 - 2nd floor, 205
 121003 NH-2 - Faridabad
 Haryana - India
 Phone: +91 129 4871206
 Email: info@cobogroup.net
 Web Site: www.cobogroup.net

**C.O.B.O. SpA**

Via Tito Speri, 10
 25024 Leno (Brescia) ITALY
 Phone +39 030 90451
 Fax +39 030 9045330



info@cobogroup.net | www.cobogroup.net

Le informazioni contenute nella presente informativa hanno scopo puramente indicativo.
 L'Azienda si riserva senza preavviso il diritto di apportare qualsiasi modifica tecnica del prodotto.
 The information published in this catalogue is purely indicative.

The Company reserves the right to introduce all technological changes of the present product at any time and without prior notice.